

33mm Toughened heat soak laminated glass with aluminium frame

TECHNICAL


Domestic application – uniformly distributed load (UDL) from 4.0 kn/m²

Manufactured to:

BSEN – 12150

BSEN – 14449

BSEN – 14179

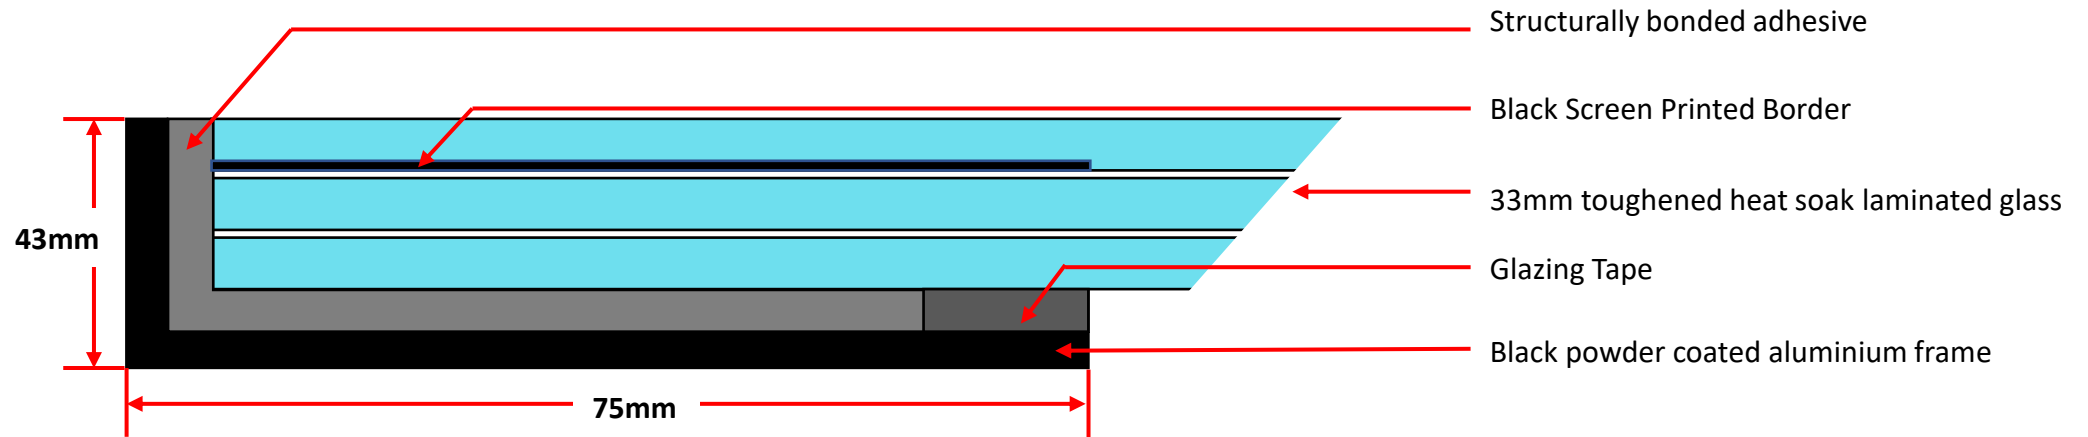

* For illustrative purposes only